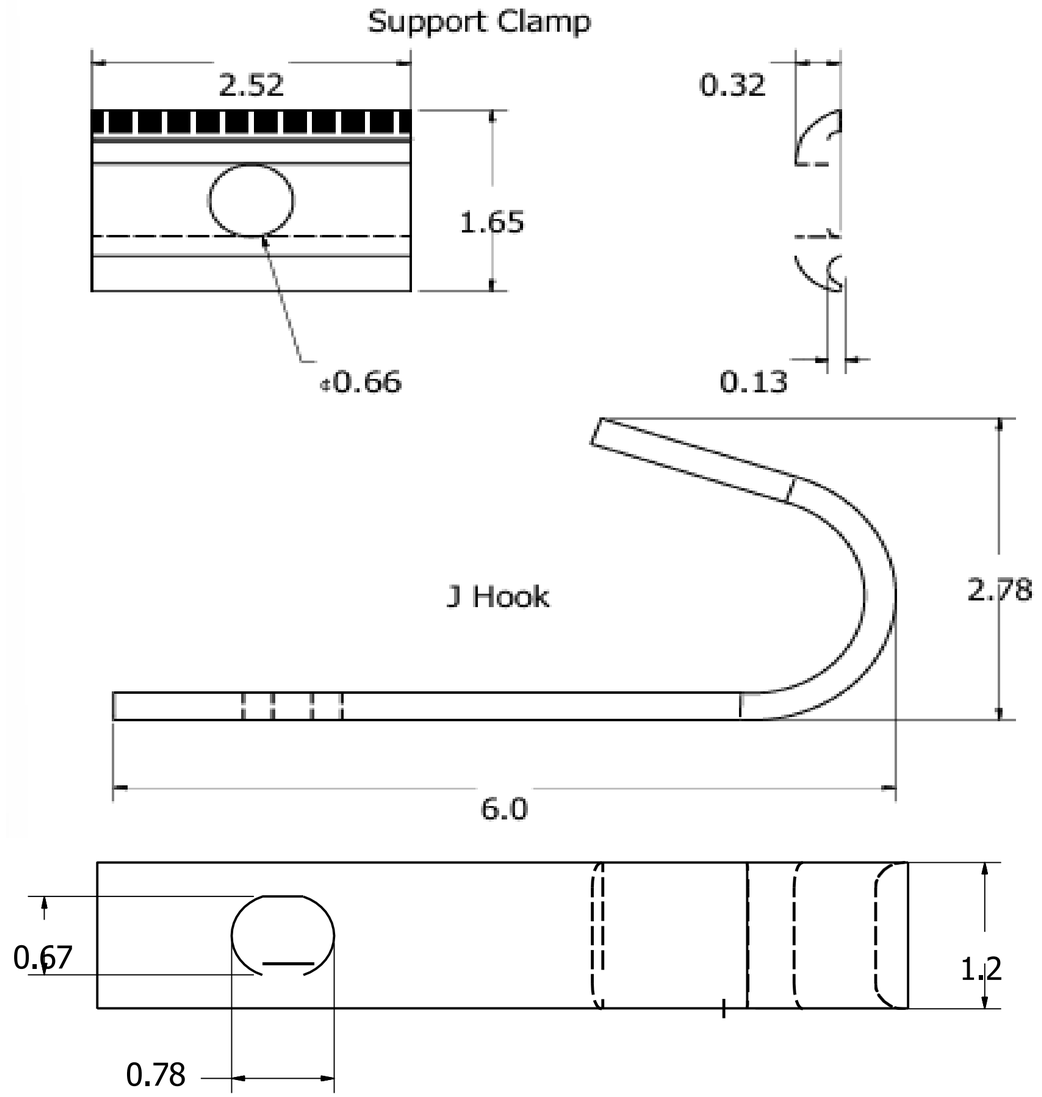

Features:

Use for figure-8 distribution wires and coaxial cables with integrated solid steel messenger wire.
The J hook provides support in the cable installation process.
The clamps are designed to grip the messenger, no tripping needed.
The (5/8") mounting bolts and nuts are sold separately and should be 3" longer than the pole diameter to accommodate the assembly.

ORDERING INFORMATION			
P/N	ITEM DESCRIPTION	PKG	PKG WEIGHT
NCM-6213	One J Hook and two Clamps	50	19 lbs.

MATERIALS	
PART NAME	MATERIAL
Support Clamp	Aluminum Alloy
J Hook	Aluminum Alloy

KDPA Enterprices LLC.
Email: Yudith.martell@kdpaenterpricesllc.com
www.kdpa-enterprises.com

DRAWN DESING-2	2/25/2014	KDPA SUPPLIES		
CHECKED		TITLE KDPA-6213 FIGURE 8 TANGENT SUPORT ASSEMBLY		
QA				
MFG				
APPROVED		SIZE C	DWG NO KDPA-6213	REV
DIMENSIONS	(in)	SCALE		SHEET 1 OF 1