


KDPA Drop Cable

Features

- Most suitable for floor routing
- Smaller bending radius fiber
- Single, two, four or six 250µm optical fiber
- Easy core takes out with notch structure
- Steel wire strength messenger
- Two steel wire strength members

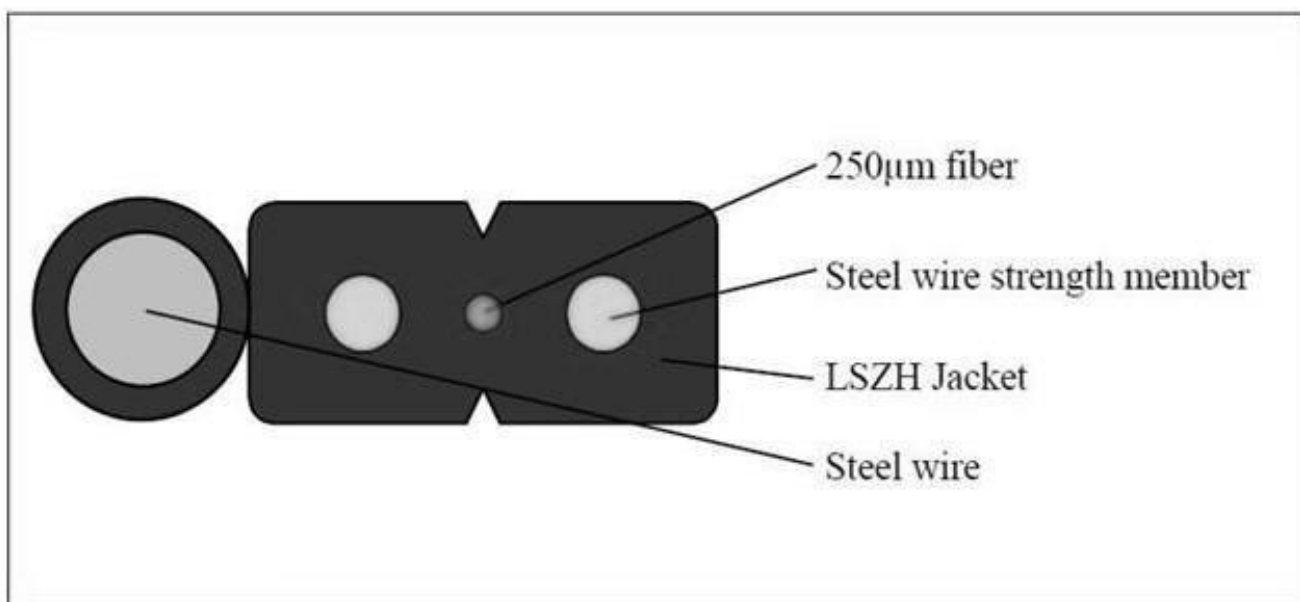

Construction Data

Fiber diameter	Fiber diameter 250μm
Core reinforce	Steel wire
Strength member	Steel wire
Outer jacket material	material LSZH
Outer jacket	Black

Technical Data

Cable diameter(mm)	$(2.0 \pm 0.2) \times (5.2 \pm 0.2)$
Cable weight(kg/km)	approx. 21
Max. loading (IEC794-1) Installation Operation	600N (with steel wire) 300N (with steel wire)
Temperature rating Operation Storage	-20°C~+60°C -20°C~+60°C
Min bend radius (IEC794-1)	15mm (without steel wire)
Crush resistance (IEC794-1)	2200N/100mm