

## Optical Adapter

### Feature

- Accurate Dimension
- Good Interchangeability and Repeatability
- Good Durability
- Good Temperature Performance

### Application

- Optical Fiber Communication System
- CATV
- Optical Fiber Sensor
- Optical test
- Instrument,etc

### Parameter

Connector type	FC、SC、ST、LC、MT-RJ,etc	
Insertion Loss(dB)	≤ 0.20	
Repeatability	≤ 0.10	
Interchangeability	≤ 0.20	
Sleeve Material	Ceramic	
Operating Temperature(°C)	-40 ~ +85	-25 ~ +70
Storage Temperature(°C)	-40 ~ +85	
Industry Standard	Bell core TA-NWT-001209	

## LC/Adapters



LC/PC SM, Simplex



LC/APC SM, Simplex



LC MM, Simplex



LC/PC SM, Duplex, Non-symmetric



LC/PC SM, Duplex, Symmetric



LC/MM, Duplex, Non-symmetric



LC/APC SM, Duplex



LC/10000M, Duplex




LC/APC SM, Duplex, SC Type, Symmetric



LC/PC SM, Duplex, SC Type



LC/PC SM, Duplex, SC Type, Flangeless

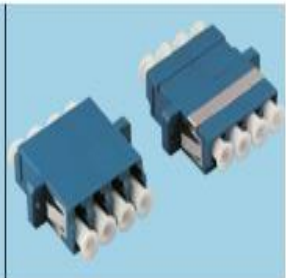

LC/PC SM, Quad

## Hybrid Adapters



SC-ST/PC Metal



SC-FC/PC Metal




SC-FC/APC Plastic



SC-FC/PC Semimetal

## FC/Adapters

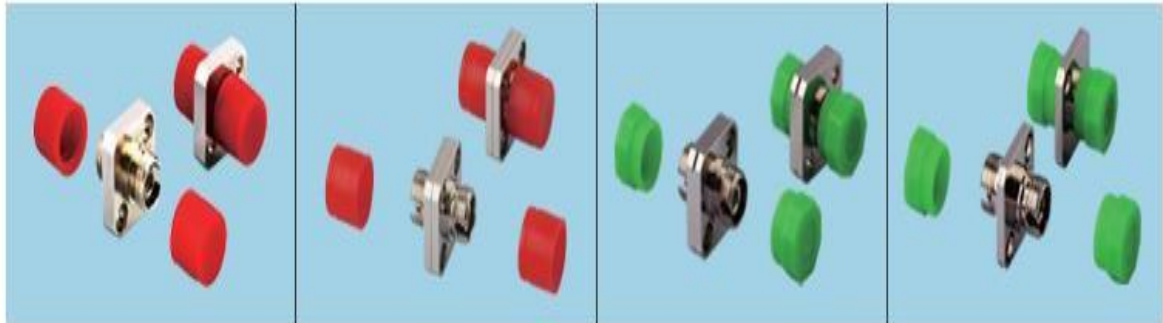

FC/PC SM,Integral Square

FC/PC SM,Separate Square

FC/APC SM,Integral Square

FC/APC SM,2mm




FC/PC SM,Small D Type

FC SM,Rectangle

FC/PC SM,Big D Type

FC/APC SM,Diamond

## SC/Adapters

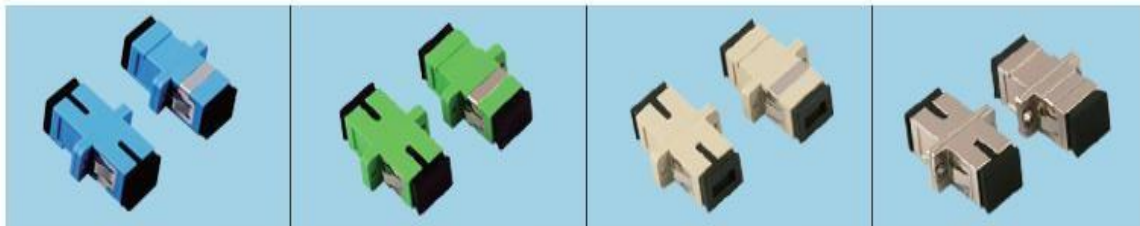


SC/PC SM,Simplex

SC/APC SC,Simplex

SC/MM,Simplex

SC/PC,SM,Simplex,Metal

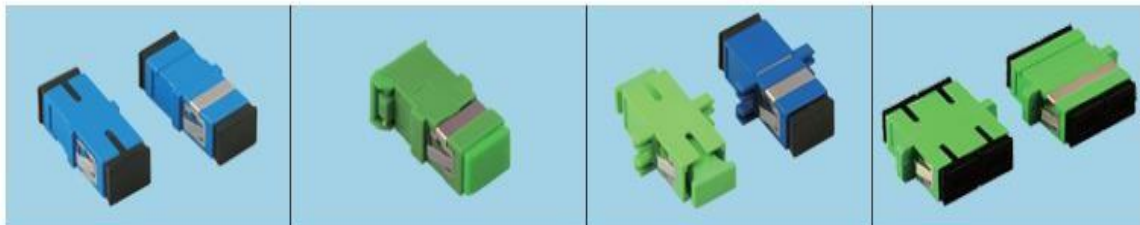

SC/PC SM,Simplex,Flangeless

SC/PC SM,Simplex With Dust Cap Assembled


SC,SM,Simplex,Card Type

SC/APC SM,Duplex

LC/PC-SM-0.9



LC/APC-2.0-SX

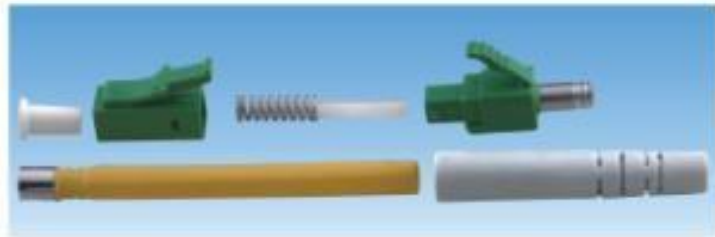

SC/APC-2.0

